
TECHNICAL DATA		
Nominal Flow Rate (at 2m Head Loss)	m³ / hr	140 - 220 m³/hour
	L/s	39 - 61 L/sec
Approximate Weight	Empty	180 kg
Inlet & Outlet Connections (Standard Flanges)	AS 2129	DN 200 Table D

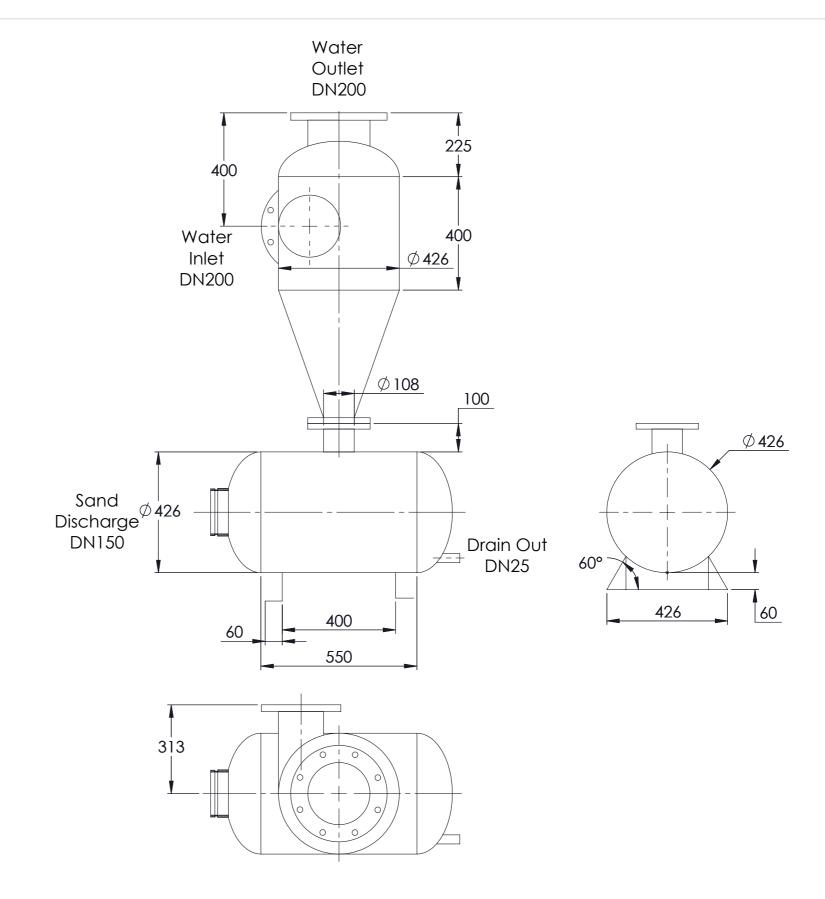


Filter Area: NA

Max. Working Pressure: 10 bar Max. Working Temperature: 65 C PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FILTAWORX PTY. LTD. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FILTAWORX PTY.
LTD. IS PROHIBITED.

FINISH
PAINTED CARBON STEEL

TOL. MACHINING ±0.25

TOL. ANGULAR ±0.25°



FILICAWOR

200MM HYDROCYCLONE SEPERATOR

A3 DWG. NO. FWS7-200

A3 FWS/-200 0

SCALE: N.T.S. WEIGHT: approx. 180 kg. SHEET: 1 OF 1

REV.

DIMENSIONS ARE IN mm