


HELIX
HYDRO



MIXER

TURBINE AGITATORS

**Agitators for tanks
up to 10,000 litres**

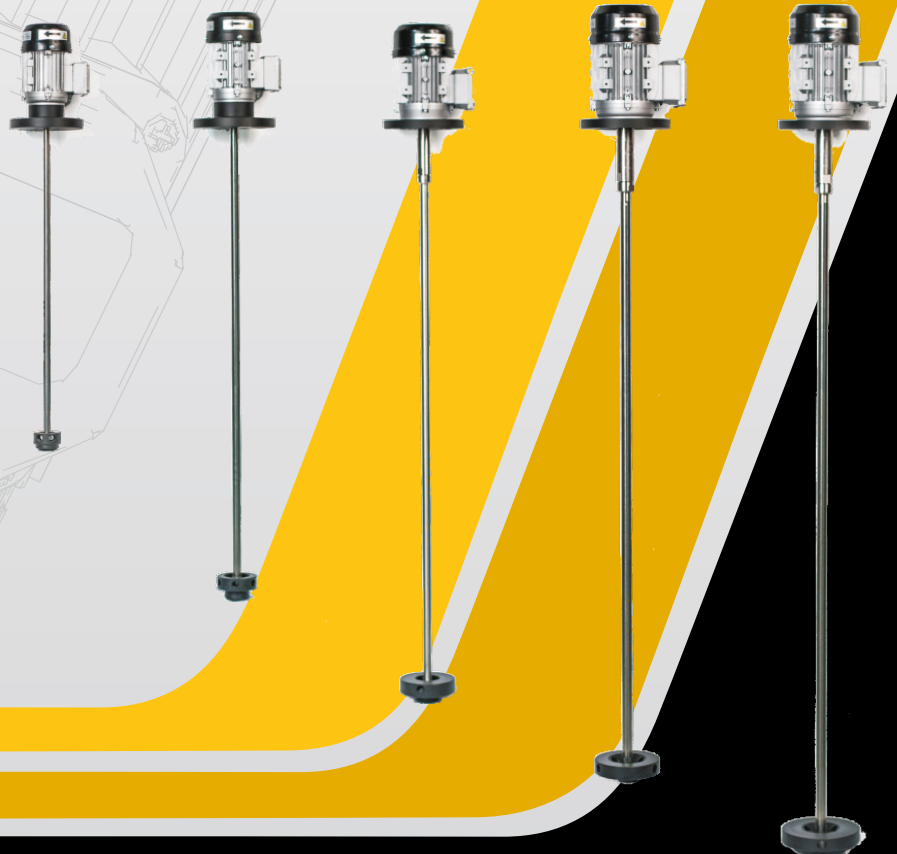


AG

TURBINE AGITATORS

Turbine agitators exclusively designed by ITC with 6 jets, three of them radial with centrifugal movement to produce a rotation of liquid, and three of them axial to stir the bottom.

Dismountable turbine without edges, for greater safety. Direct transmission shaft in stainless steel.

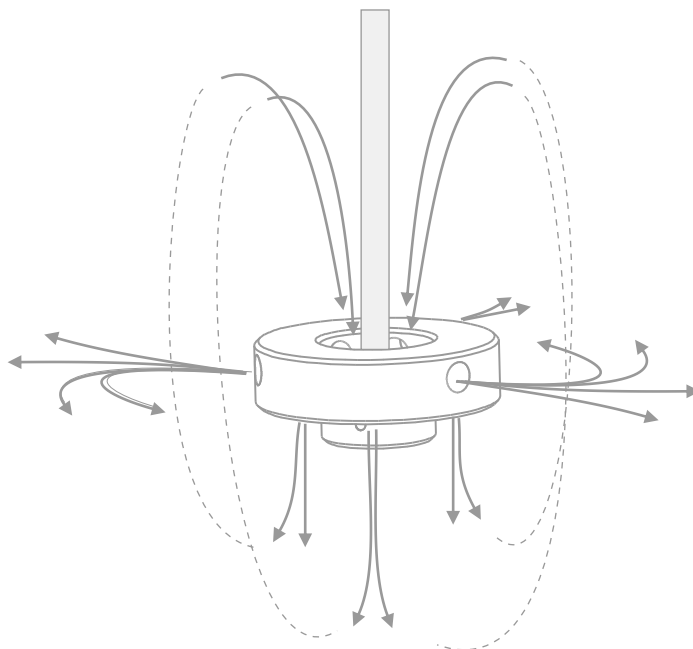

SUPPORT

FLANGE



SHAFT

AISI 304



Single Phase	220V	50Hz
	115/220V	60Hz

Three-Phase	220/380V	50Hz
	220/380V	60Hz


Shaft	AISI 304 /
-------	------------




Turbine	P.P.
---------	------

TECHNICAL FEATURES

CODE	MOTOR	DIMENSIONS		AGITATION			
	Watts	L mm	ØT mm	Ø max m	m3	m3/h	
 AG. 1.1 m							
	3PH 50Hz 70-JB-B1100-T09P	185	1100	90	0.8	0.6	1.6
 AG. 1.5 m							
	*3PH 70-A_-B1300-T13P	370	1300	130	1.5	3	6.5
	*1PH 70-B_-B1300-T13P	370	1300	130	1.5	3	6.5
 AG. 1.5 m							
	*3PH 50Hz 70-L_-A1500-T15P	750	1500	150	2.7	10	8.3
	*1PH 50Hz 70-M_-A1500-T15P	750	1500	150	2.7	10	8.3
 AG. 2.0 m							
	3PH 70-SB-A2000-T18P	550	2000	180	1.9	7.0	8.3

DIMENSIONS

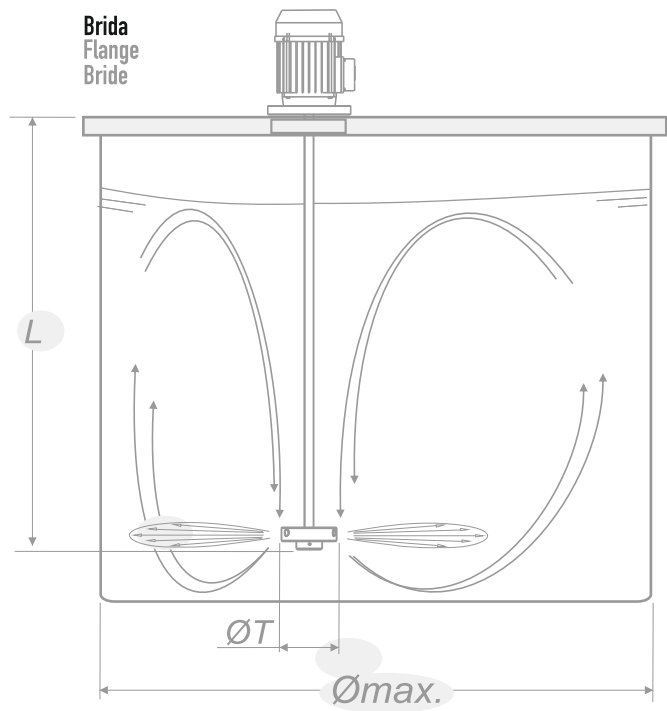

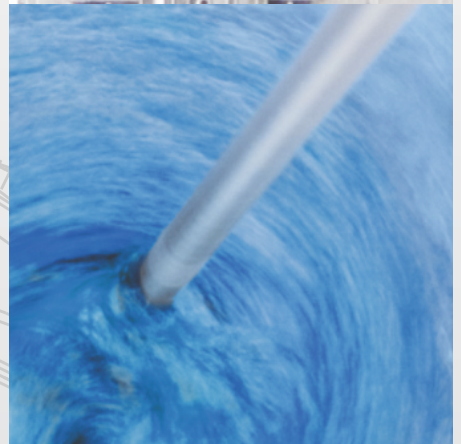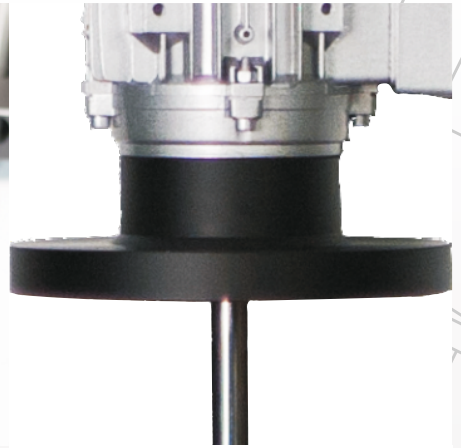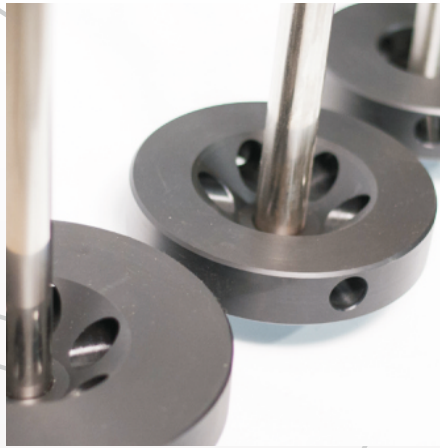

MIXER

Turbine Agitators

- ✓ Mixing volume from 150l to 10,000l
- ✓ Motor power from 67W to 750W
- ✓ Agitation Height to 2.5 m



05 - 2022



Helix Hydro Pty. Ltd.
23 Sir Laurence Drive
Seaford, Victoria 3198
Phone: 03 9580 2122

Contact: enquiries@helixhydro.com.au
Website: www.helixhydro.com.au

AVAILABLE FROM

VIC/TAS	P: 0427 033 967
WA/NT	P: 0409 115 895
NSW/ACT	P: 0414 675 663
QLD	P: 0417 733 508
SA	P: 0427 033 967

